




## WD15÷30 series

**NEW MAP**  
never stop innovating




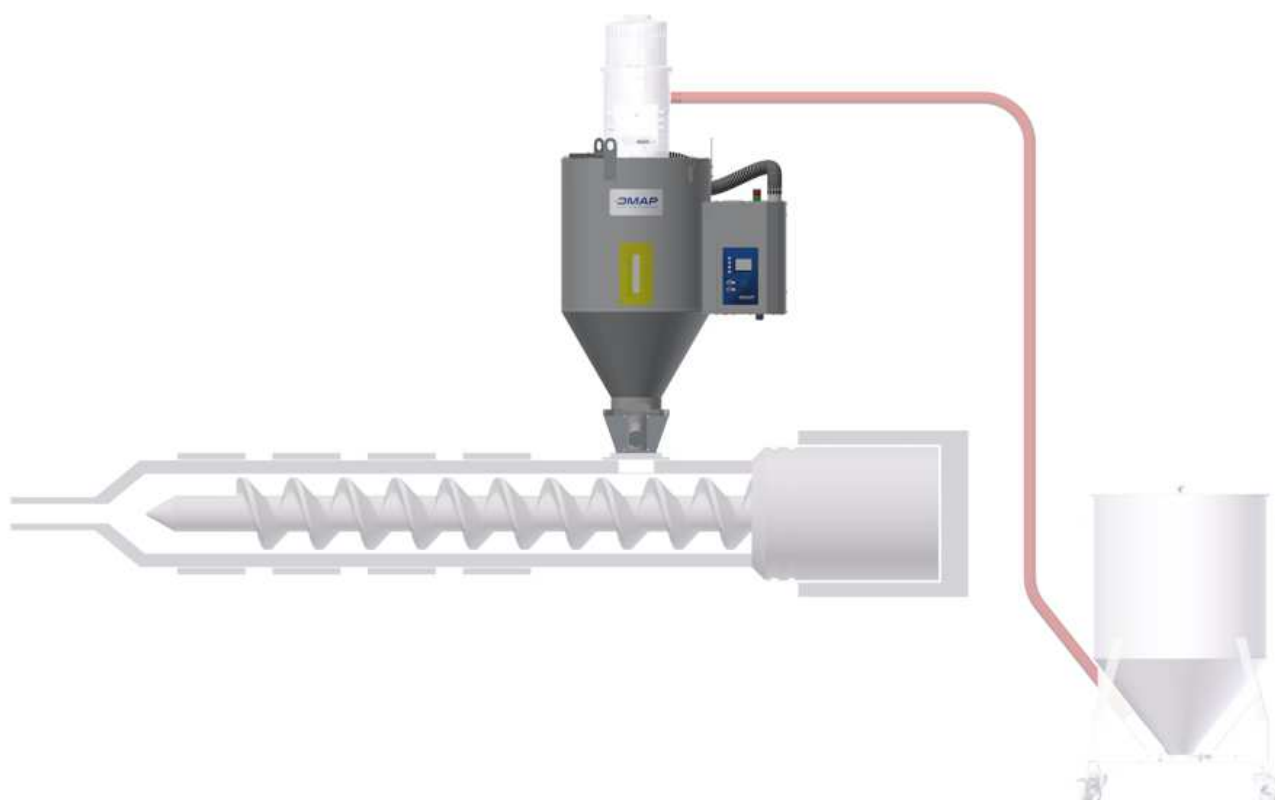

# WD15÷30 series

**NEW MAP**  
never stop innovating

| WD                                                             |                   | WD15-MT30   | WD20-MT50   | WD25-MT75   | WD30-MT100  |
|----------------------------------------------------------------|-------------------|-------------|-------------|-------------|-------------|
| Portata d'aria<br>Air Flow                                     | m <sup>3</sup> /h | 15          | 20          | 25          | 30          |
| Punto di rugiada<br>Dew Point                                  | °C                | -40         | -40         | -40         | -40         |
| Ventilatore processo<br>Process fan                            | W                 | 75          | 75          | 75          | 75          |
| Ventilatore rigenerazione<br>Regeneration fan                  | W                 | 8           | 8           | 8           | 8           |
| Ventilatore raffreddamento<br>Cooling fan                      | W                 | 8.6         | 8.6         | 8.6         | 8.6         |
| Riscaldamento processo<br>Process heating                      | W                 | 1600        | 1600        | 1600        | 1600        |
| Rigenerazione processo<br>Regeneration heating                 | W                 | 1000        | 1000        | 1000        | 1000        |
| Campo temperatura deumidificazione<br>Drying temperature range | °C                | 50 ÷ 150    | 50 ÷ 150    | 50 ÷ 150    | 50 ÷ 150    |
| Voltaggio<br>Voltage                                           |                   | 230V/1/50Hz | 230V/1/50Hz | 230V/1/50Hz | 230V/1/50Hz |
| Volume tramoggia<br>Hopper volume                              | dm <sup>3</sup>   | 30          | 50          | 75          | 100         |

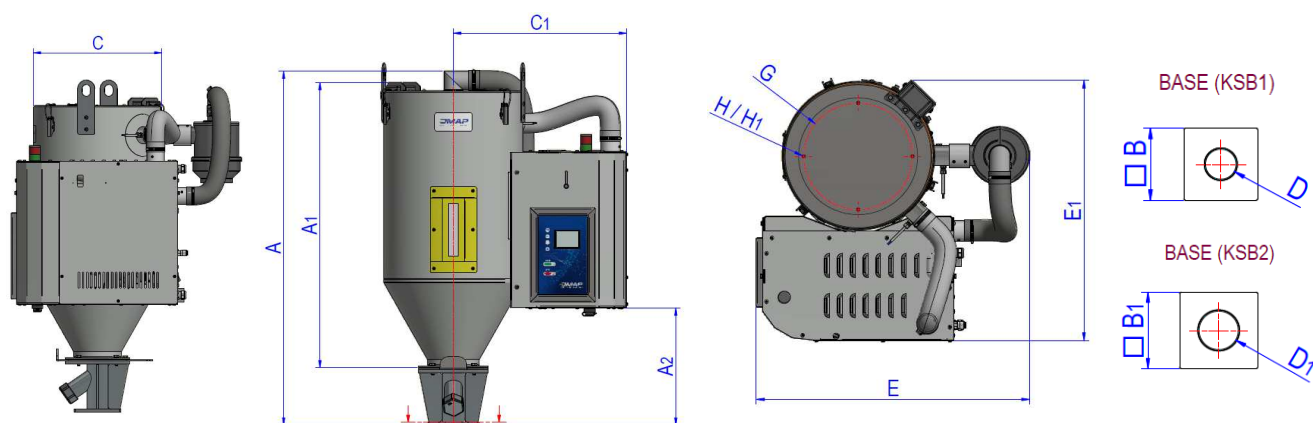


| WD     |    | WD15-MT30 | WD20-MT50 | WD25-MT75 | WD30-MT100 |
|--------|----|-----------|-----------|-----------|------------|
| A      | mm | 958       | 926       | 1127      | 1127       |
| A1     | mm | 772       | 765       | 965       | 965        |
| A2     | mm | 318       | 318       | 518       | 518        |
| B      | mm | 135 x 135 | 135 x 135 | 135 x 135 | -          |
| B1     | mm | -         | -         | -         | 150 x 150  |
| C (ø)  | mm | 370       | 490       | 490       | 550        |
| C1     | mm | 460       | 520       | 520       | 552        |
| D (ø)  | mm | 56        | 56        | 56        | -          |
| D1 (ø) | mm | -         | -         | -         | 76         |
| E      | mm | 667       | 724       | 724       | 782        |
| E1     | mm | 648       | 765       | 765       | 827        |
| G (ø)  | mm | 265       | 265       | 265       | 265        |
| H (M)  | mm | 6         | -         | -         | -          |
| H1 (ø) | mm | -         | 6         | 6         | 6          |



# WD15÷30 series

**NEW MAP**  
never stop innovating

| WDC                                                            |                   | WDC15-MT30  | WDC20-MT50  | WDC25-MT75  | WDC30-MT100 |
|----------------------------------------------------------------|-------------------|-------------|-------------|-------------|-------------|
| Portata d'aria<br>Air Flow                                     | m <sup>3</sup> /h | 15          | 20          | 25          | 30          |
| Punto di rugiada<br>Dew Point                                  | °C                | -40         | -40         | -40         | -40         |
| Ventilatore processo<br>Process fan                            | W                 | 75          | 75          | 75          | 75          |
| Ventilatore rigenerazione<br>Regeneration fan                  | W                 | 8           | 8           | 8           | 8           |
| Ventilatore raffreddamento<br>Cooling fan                      | W                 | 8.6         | 8.6         | 8.6         | 8.6         |
| Riscaldamento processo<br>Process heating                      | W                 | 1600        | 1600        | 1600        | 1600        |
| Rigenerazione processo<br>Regeneration heating                 | W                 | 1000        | 1000        | 1000        | 1000        |
| Campo temperatura deumidificazione<br>Drying temperature range | °C                | 50 ÷ 150    | 50 ÷ 150    | 50 ÷ 150    | 50 ÷ 150    |
| Voltaggio<br>Voltage                                           |                   | 230V/1/50Hz | 230V/1/50Hz | 230V/1/50Hz | 230V/1/50Hz |
| Volume tramoggia<br>Hopper volume                              | dm <sup>3</sup>   | 30          | 50          | 75          | 100         |

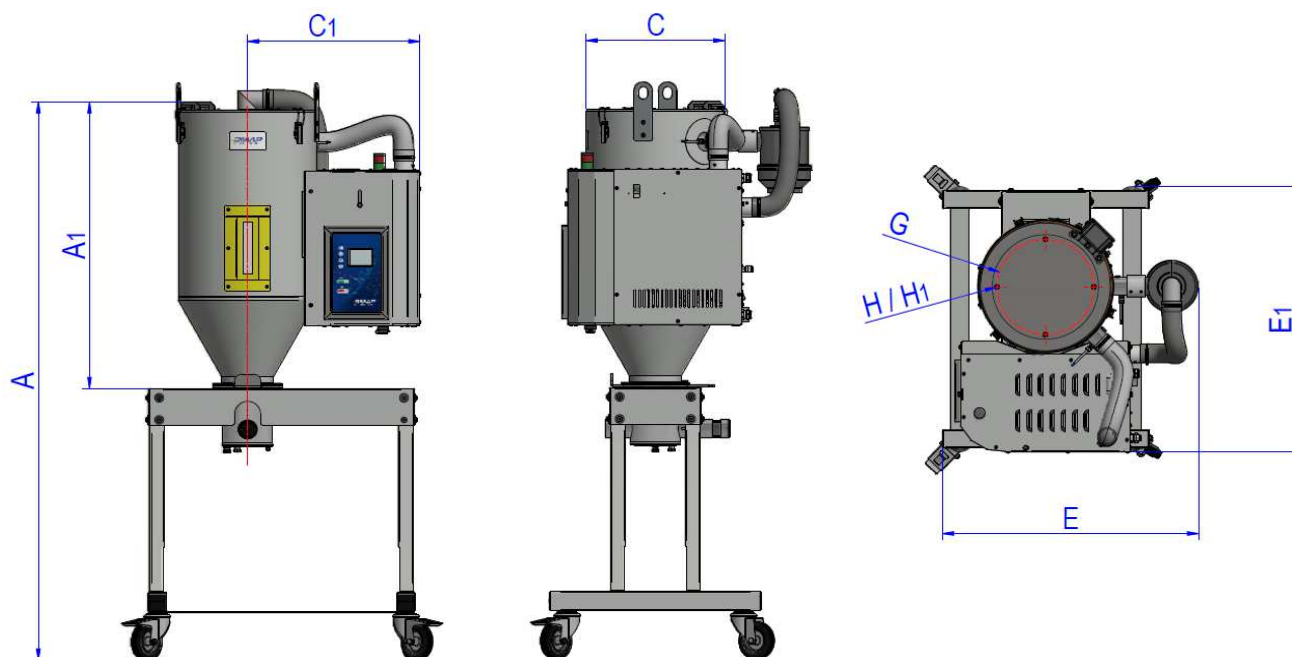


| WDC    |    | WDC15-MT30 | WDC20-MT50 | WDC25-MT75 | WDC30-MT100 |
|--------|----|------------|------------|------------|-------------|
| A      | mm | 1520       | 1520       | 1713       | 1713        |
| A1     | mm | 772        | 765        | 965        | 965         |
| C (ø)  | mm | 370        | 490        | 490        | 550         |
| C1     | mm | 460        | 520        | 520        | 552         |
| E      | mm | 700        | 759        | 759        | 789         |
| E1     | mm | 737        | 797        | 797        | 829         |
| G (ø)  | mm | 265        | 265        | 265        | 265         |
| H (M)  | mm | 6          | -          | -          | -           |
| H1 (ø) | mm | -          | 6          | 6          | 6           |



## WD.E 50÷150 series

**NEW MAP**  
never stop innovating

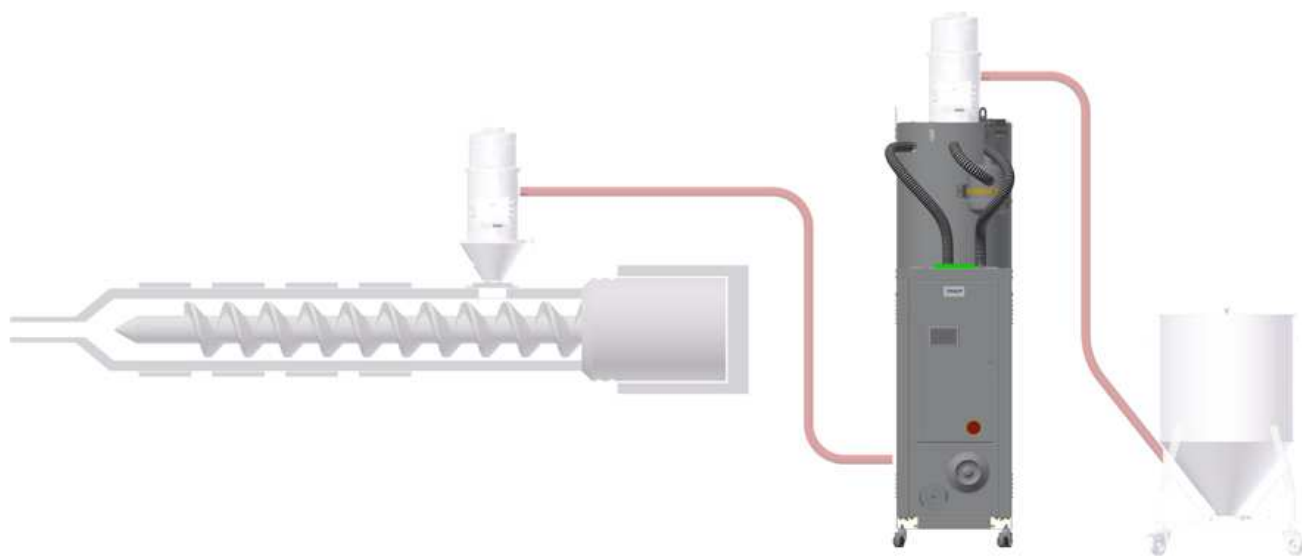



WDS.E 150÷350 series

**NEW DMAP**  
never stop innovating






# WDS.E 150÷350 series

**NEW MAP**  
never stop innovating

| WDS.E                                              |                   | WDS150.E-300  | WDS150.E-400  | WDS250.E-300  | WDS250.E-400  | WDS250.E-600  |
|----------------------------------------------------|-------------------|---------------|---------------|---------------|---------------|---------------|
| Temperatura di processo<br>Process temperature     | °C                | 70 ÷ 150      | 70 ÷ 150      | 70 ÷ 150      | 70 ÷ 150      | 70 ÷ 150      |
| Portata d'aria<br>Air flow                         | m <sup>3</sup> /h | 150           | 150           | 250           | 250           | 250           |
| Potenza soffiante<br>Blower power                  | kW                | 0,85          | 0,85          | 1,5           | 1,5           | 1,5           |
| Resistenza processo<br>Process heating             | kW                | 4,5           | 4,5           | 4,5           | 4,5           | 4,5           |
| Resistenza rigenerazione<br>Regeneration heating   | kW                | 2,8           | 2,8           | 2,8           | 2,8           | 2,8           |
| Totale potenza installata<br>Total installed power | kW                | 8             | 8             | 9             | 9             | 9             |
| Voltaggio<br>Voltage                               |                   | 400V/3+N/50Hz | 400V/3+N/50Hz | 400V/3+N/50Hz | 400V/3+N/50Hz | 400V/3+N/50Hz |
| Volume tramoggia<br>Hopper volume                  | dm <sup>3</sup>   | 300           | 400           | 300           | 400           | 600           |

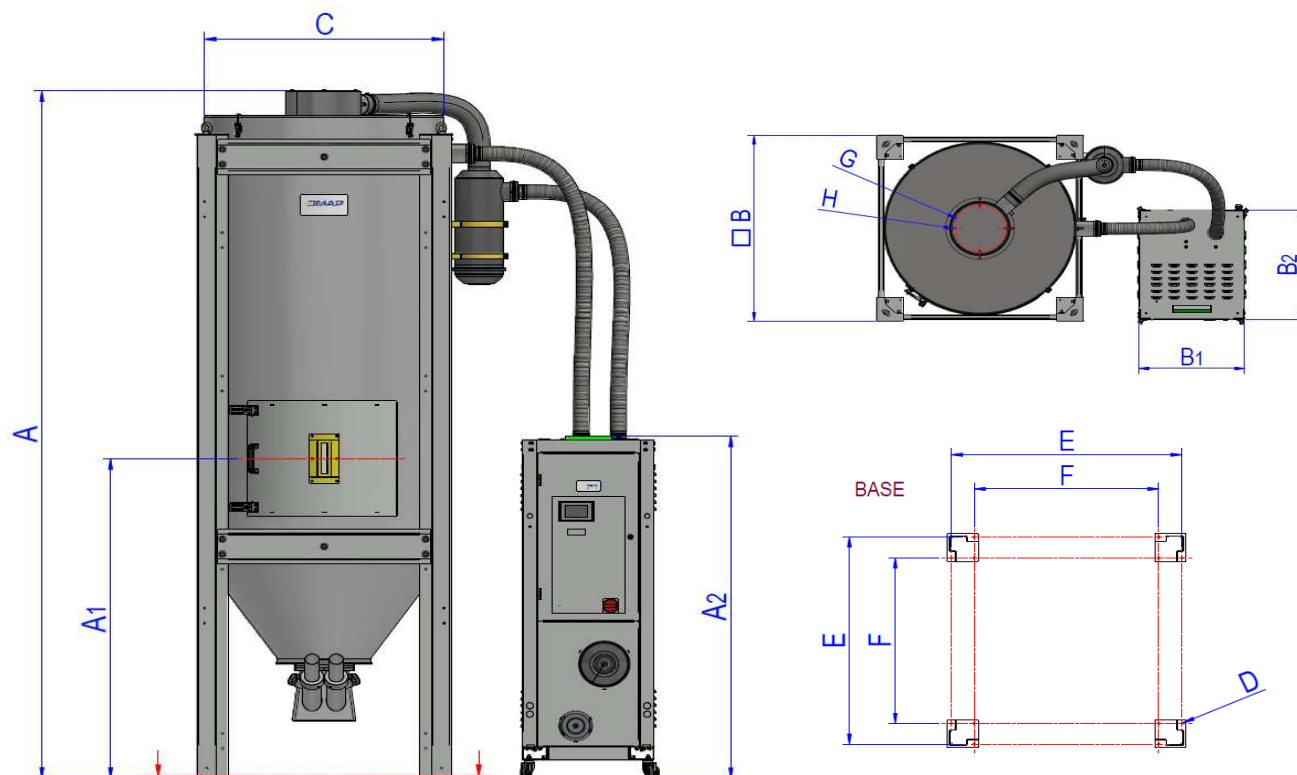


| WDS.E |    | WDS150.E-300 | WDS150.E-400 | WDS250.E-300 | WDS250.E-400 | WDS250.E-600 |
|-------|----|--------------|--------------|--------------|--------------|--------------|
| A     | mm | 2206         | 2511         | 2206         | 2511         | 2511         |
| A1    | mm | 1352         | 1352         | 1352         | 1352         | 1555         |
| A2    | mm | 1374         | 1374         | 1374         | 1374         | 1374         |
| B     | mm | 914 x 914    | 914 x 914    | 914 x 914    | 914 x 914    | 1080 x 1080  |
| B1    | mm | 550          | 550          | 550          | 550          | 550          |
| B2    | mm | 635          | 635          | 635          | 635          | 635          |
| C     | mm | 824          | 824          | 824          | 824          | 1004         |
| D (ø) | mm | 12           | 12           | 12           | 12           | 12           |
| E     | mm | 880          | 880          | 880          | 880          | 1045         |
| F     | mm | 708          | 708          | 708          | 708          | 835          |
| G (ø) | mm | 265          | 265          | 265          | 265          | 265          |
| H (M) | mm | 6            | 6            | 6            | 6            | 6            |



# WDS.E 150÷350 series

**NEW MAP**  
never stop innovating

| WDS.E                                              |                   | WDS250.E-800  | WDS250.E-1000 | WDS350.E-800  | WDS350.E-1000 | WDS350.E-1500 |
|----------------------------------------------------|-------------------|---------------|---------------|---------------|---------------|---------------|
| Temperatura di processo<br>Process temperature     | °C                | 70 ÷ 150      | 70 ÷ 150      | 70 ÷ 150      | 70 ÷ 150      | 70 ÷ 150      |
| Portata d'aria<br>Air flow                         | m <sup>3</sup> /h | 250           | 250           | 350           | 350           | 350           |
| Potenza soffiante<br>Blower power                  | kW                | 1,5           | 1,5           | 3,0           | 3,0           | 3,0           |
| Resistenza processo<br>Process heating             | kW                | 4,5           | 4,5           | 7,5           | 7,5           | 7,5           |
| Resistenza rigenerazione<br>Regeneration heating   | kW                | 2,8           | 2,8           | 2,8           | 2,8           | 2,8           |
| Totale potenza installata<br>Total installed power | kW                | 9             | 9             | 13            | 13            | 13            |
| Voltaggio<br>Voltage                               |                   | 400V/3+N/50Hz | 400V/3+N/50Hz | 400V/3+N/50Hz | 400V/3+N/50Hz | 400V/3+N/50Hz |
| Volume tramoggia<br>Hopper volume                  | dm <sup>3</sup>   | 800           | 1000          | 800           | 1000          | 1500          |

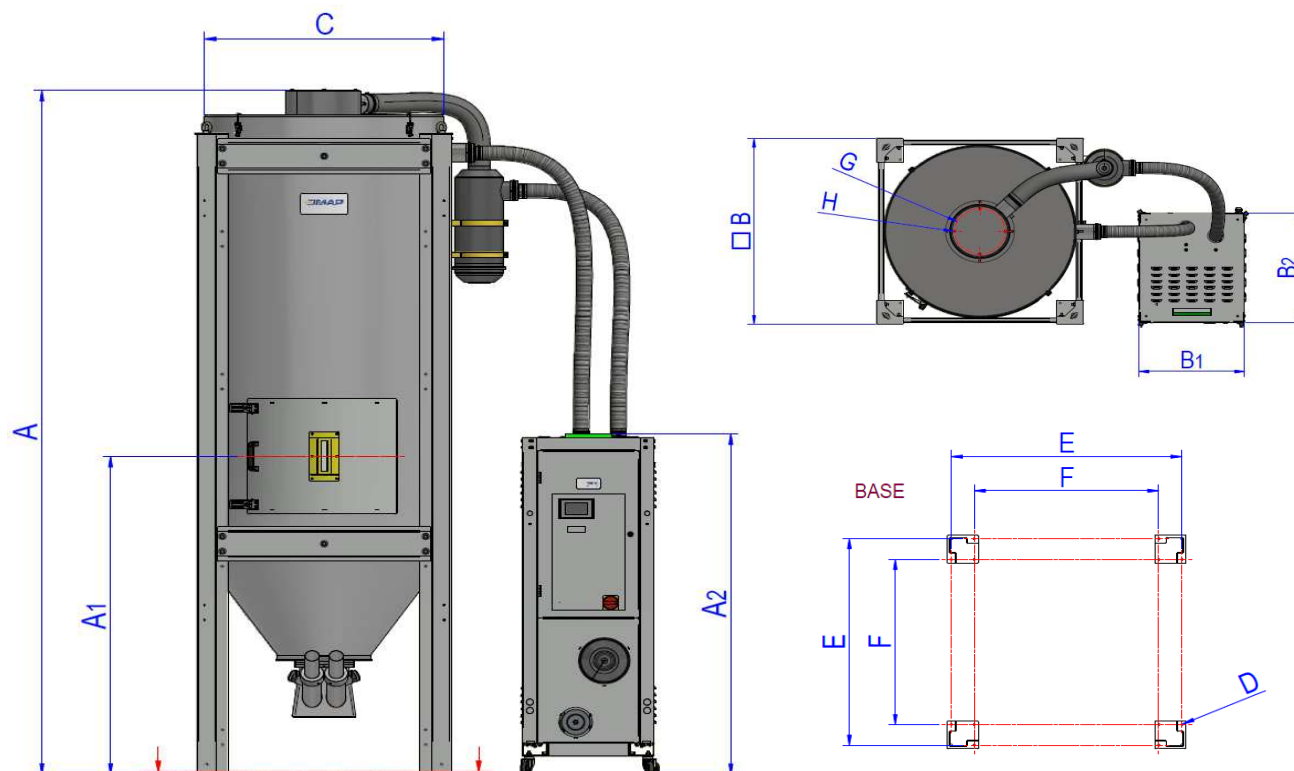


| WDS.E |    | WDS250.E-800 | WDS250.E-1000 | WDS350.E-800 | WDS350.E-1000 | WDS350.E-1500 |
|-------|----|--------------|---------------|--------------|---------------|---------------|
| A     | mm | 2852         | 3208          | 2852         | 3208          | 3636          |
| A1    | mm | 1492         | 1492          | 1492         | 1492          | 2004          |
| A2    | mm | 1374         | 1374          | 1374         | 1374          | 1374          |
| B     | mm | 1080 x 1080  | 1080 x 1080   | 1080 x 1080  | 1080 x 1080   | 1295 x 1295   |
| B1    | mm | 550          | 550           | 550          | 550           | 550           |
| B2    | mm | 635          | 635           | 635          | 635           | 635           |
| C     | mm | 1004         | 1004          | 1004         | 1004          | 1180          |
| D (ø) | mm | 12           | 12            | 12           | 12            | 12            |
| E     | mm | 1045         | 1045          | 1045         | 1045          | 1255          |
| F     | mm | 835          | 835           | 835          | 835           | 995           |
| G (ø) | mm | 265          | 265           | 265          | 265           | 265           |
| H (M) | mm | 6            | 6             | 6            | 6             | 6             |



# WD.E 50÷150 series

| WDC.E                                              |      | WDC50.E-100   | WDC100.E-150  | WDC150.E-200  |
|----------------------------------------------------|------|---------------|---------------|---------------|
| Temperatura di processo<br>Process temperature     | °C   | 70 ÷ 150      | 70 ÷ 150      | 70 ÷ 150      |
| Portata d'aria<br>Air flow                         | m³/h | 50            | 100           | 150           |
| Potenza soffiante<br>Blower power                  | kW   | 0,85          | 0,85          | 0,85          |
| Resistenza processo<br>Process heating             | kW   | 4,5           | 4,5           | 4,5           |
| Resistenza rigenerazione<br>Regeneration heating   | kW   | 2,8           | 2,8           | 2,8           |
| Totale potenza installata<br>Total installed power | kW   | 8             | 8             | 8             |
| Voltaggio<br>Voltage                               |      | 400V/3+N/50Hz | 400V/3+N/50Hz | 400V/3+N/50Hz |
| Volume tramoggia<br>Hopper volume                  | dm³  | 100           | 150           | 200           |

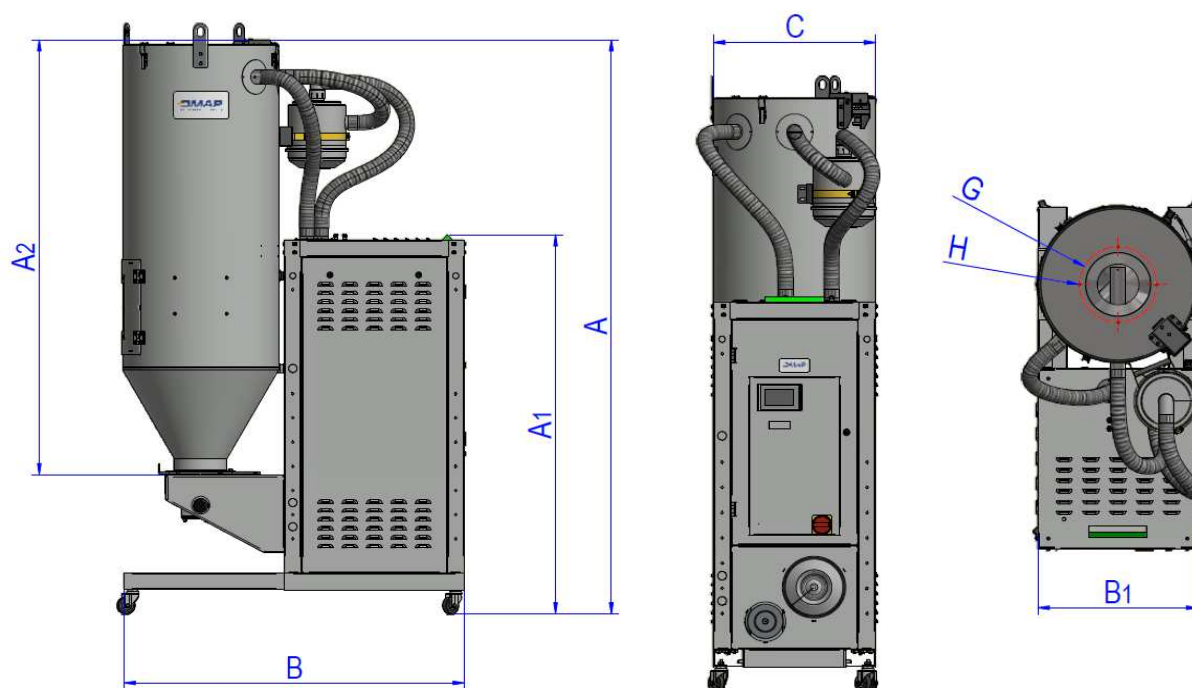

| WDC.E |    | WDC50.E-100 | WDC100.E-150 | WDC150.E-200 |
|-------|----|-------------|--------------|--------------|
| A     | mm | 1830        | 1950         | 2080         |
| A1    | mm | 1374        | 1374         | 1374         |
| A2    | mm | 974         | 1274         | 1574         |
| B     | mm | 1200        | 1200         | 1200         |
| B1    | mm | 550         | 550          | 550          |
| G (ø) | mm | 265         | 265          | 265          |
| H (M) | mm | 6           | 6            | 6            |