




AM series

NEW DMAP
never stop innovating




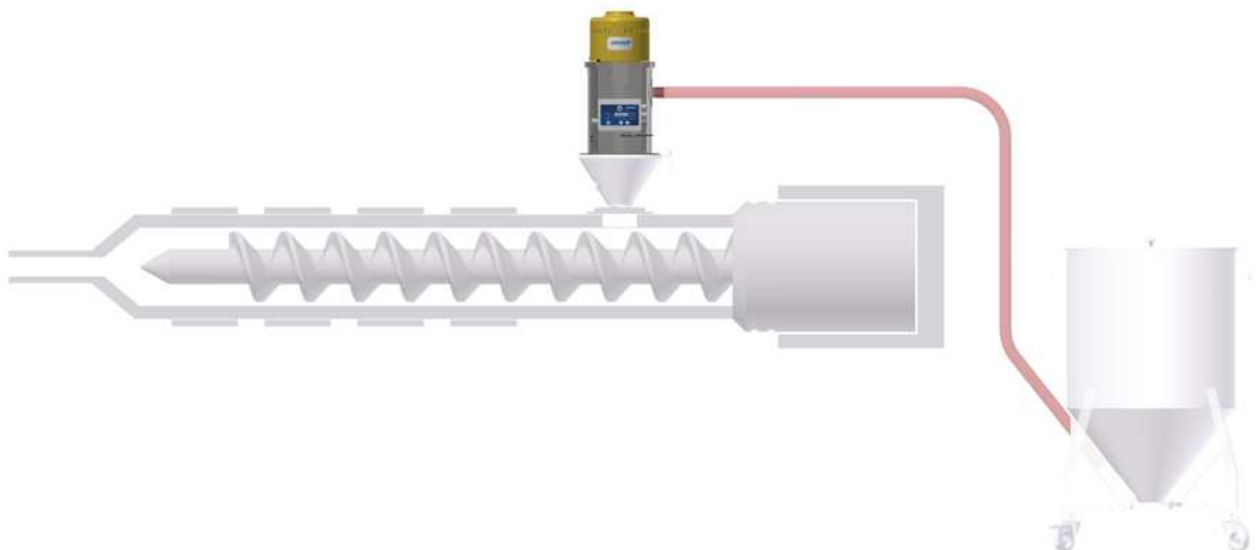

AM series

NEW MMAP
never stop innovating

AM series		AM04	AM05	AM10
Volume ciclone Receiver volume	dm ³	4	5	10
Potenza motore Motor power	W	850	1100	1100
Tensione/Frequenza Voltage/Frequency	-	230V/1/50Hz	230V/1/50-60Hz	230V/1/50-60Hz
Produzione Oraria Throughput	kg/h	60	110	180
Filtro Filter	-	Tessuto Cloth	Tessuto Cloth	Tessuto Cloth

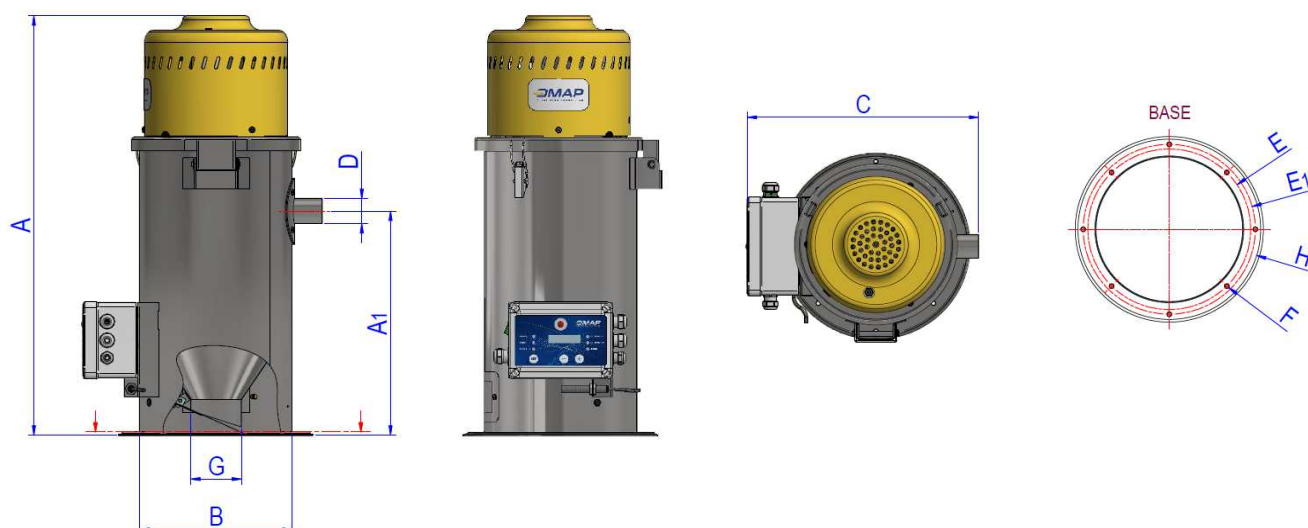


AM series		AM04	AM05	AM10
A	mm	500	550	670
A1	mm	248	238	358
B (ø)	mm	159	240	240
C	mm	295	375	375
D (ø)	mm	40	40/50/60	40/50/60
E (ø)	mm	182	265	265
E1 (ø)	mm	-	280	280
F (ø)	mm	7	8	8
G (ø)	mm	50	80	80
H	mm	200	297	297



TR series


NEW **MAP**
never stop innovating

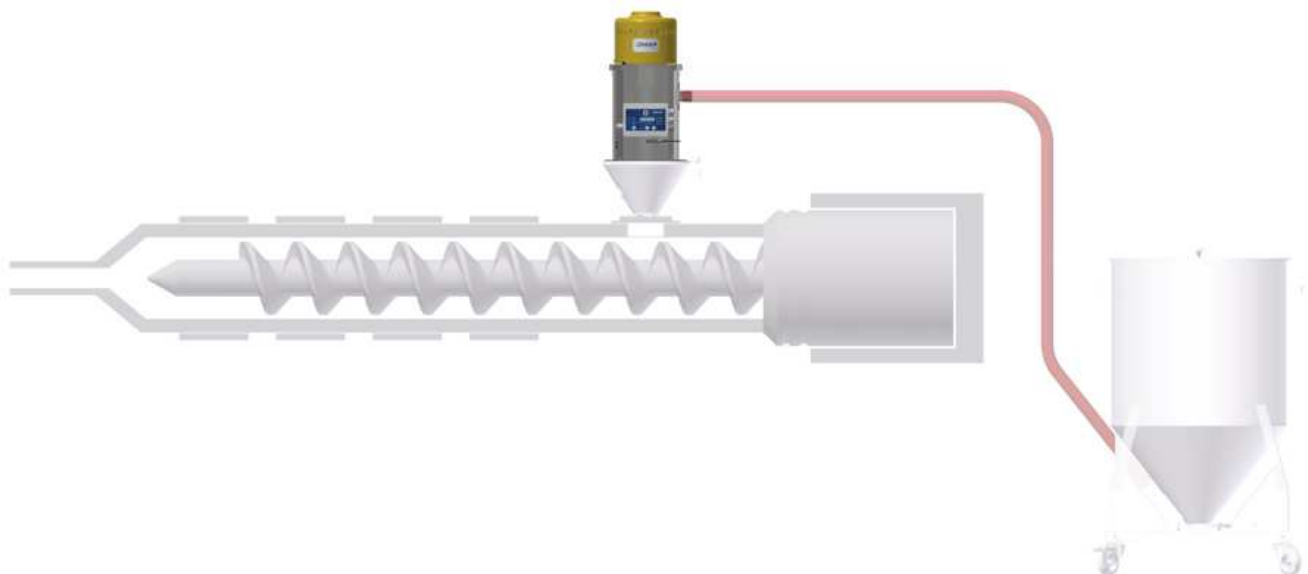



AT/FT series


NEWMAP
never stop innovating

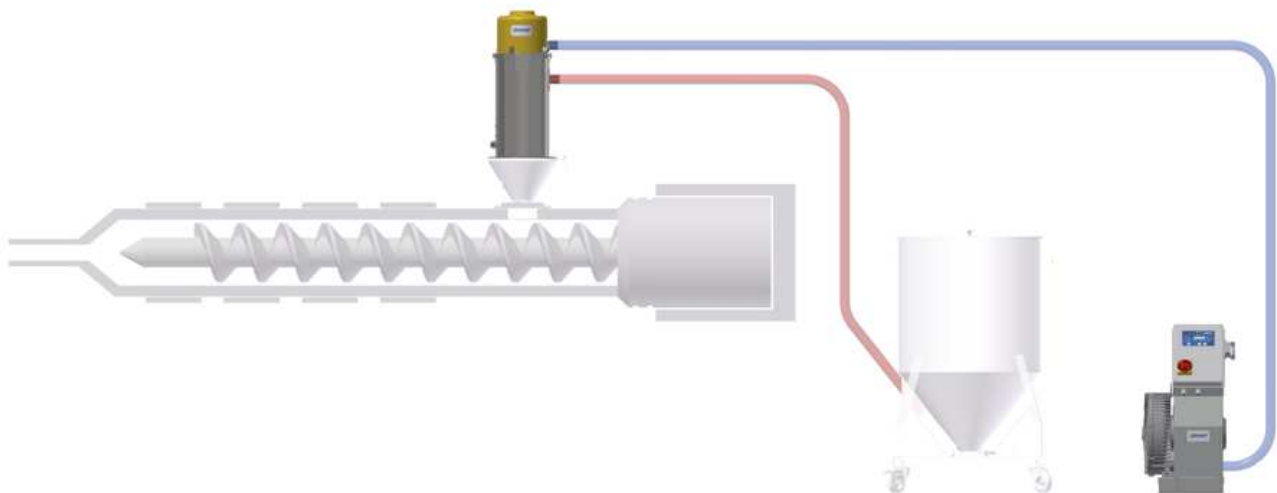




AT FMT series

NEWMAP
never stop innovating

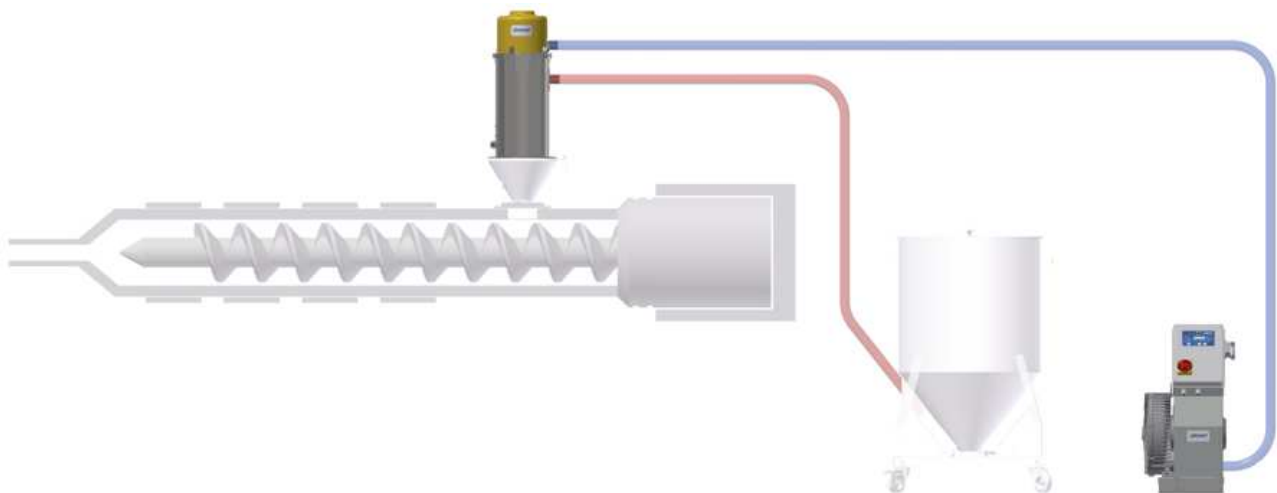




AT FMT series		AT03 FMT	AT04 FMT	AT05 FMT
Potenza motore <i>Motor power</i>	W	3000	4000	5500
Filtro <i>Filter</i>		FMT	FMT	FMT
Portata d'aria massima <i>Max air flow</i>	m ³ /h	330	320	320
Pressione statica <i>Static pressure</i>	kPa	27	36	45
Tubo del vuoto <i>Vacuum pipe</i>	ø(mm)	50 - 60	50 - 60 - 70	50 - 60 - 80
Cycloni abbinabili <i>Receivers to fit</i>	dm ³	20 ÷ 30	30 ÷ 60	30 ÷ 60

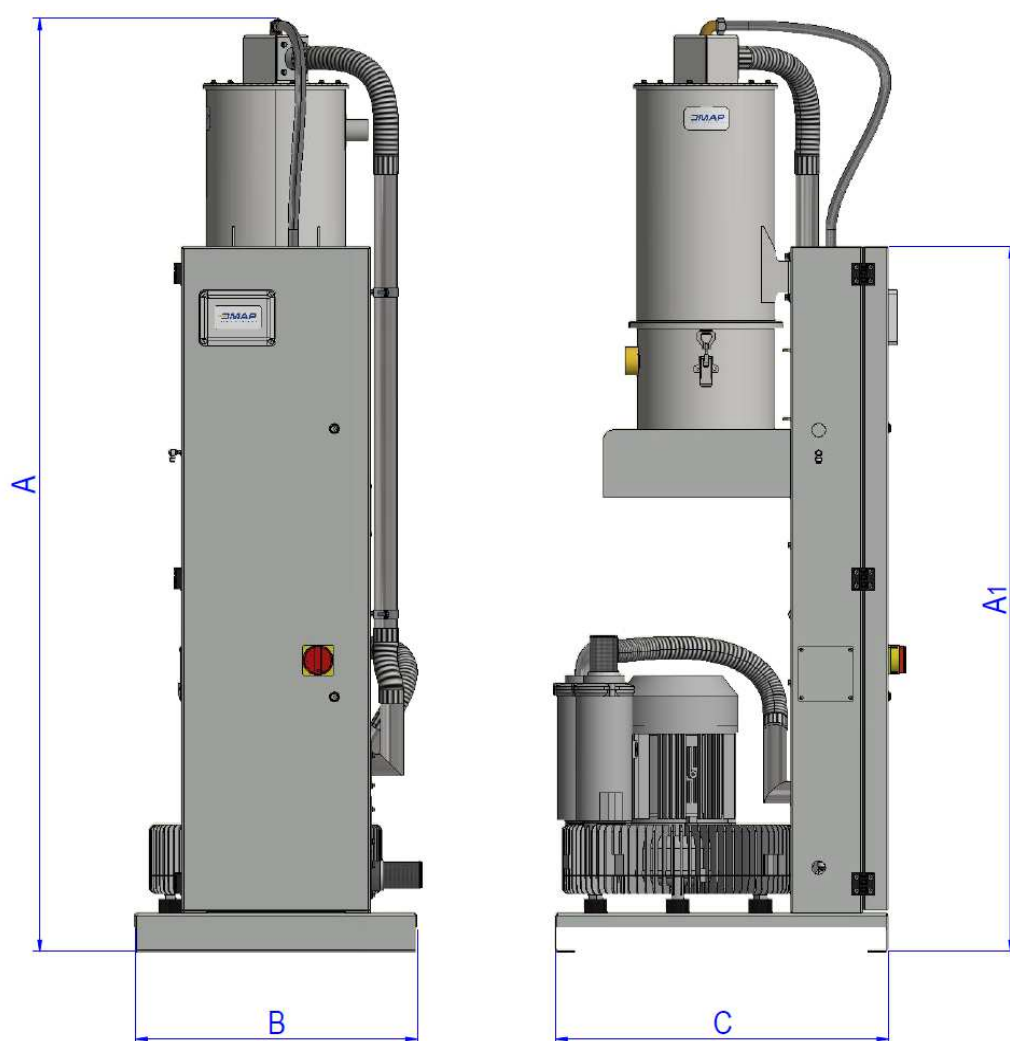

AT FMT series		AT03 FMT	AT04 FMT	AT05 FMT
A	mm	2037	2037	2037
A1	mm	1539	1539	1539
B	mm	604	604	604
C	mm	714	714	714



AT FMT series		R20	R30	R40	R60
Volume ricevitore Receiver volume	dm ³	20	30	40	60
Filtro Filter		Rete Grid	Rete Grid	Rete Grid	Rete Grid
Pulizia filtro Filter air blast		-	-	-	-
Tubo del vuoto Vacuum pipe	ø (mm)	50 - 60	50 - 60	60 - 70	60 - 70
Scarico Discharge	ø (mm)	80	80	130	130

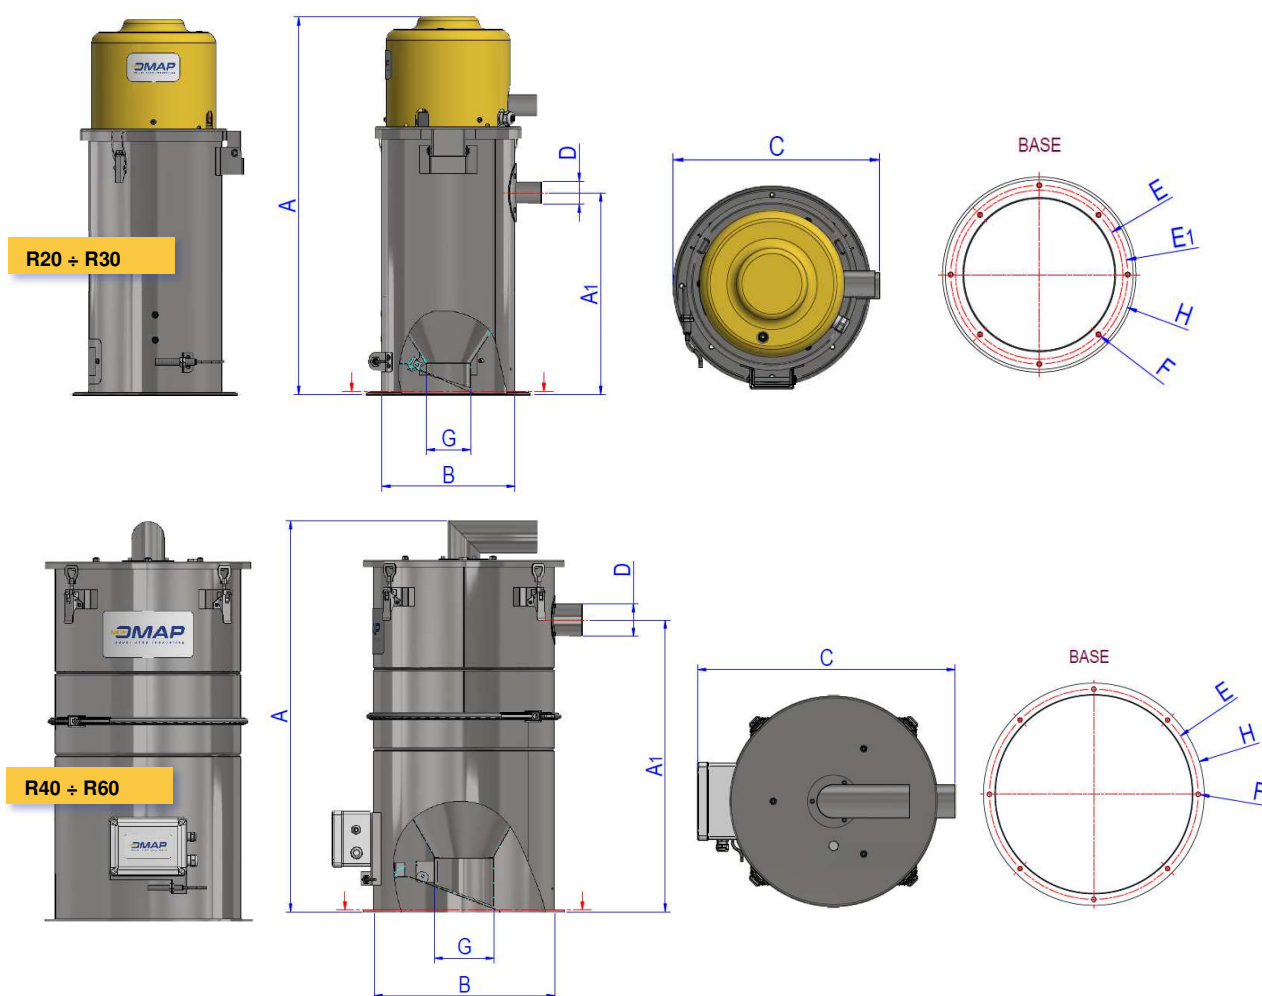


AT FMT series		R20	R30	R40	R60
A	mm	865	1089	845	1025
A1	mm	554	777	630	810
B (ø)	mm	240	240	394	394
C	mm	320	320	479	479
D (ø)	mm	50/60	50/60	60/70	60/70
E (ø)	mm	265	265	416	416
E1 (ø)	mm	280	280	-	-
F (ø)	mm	8	8	8	8
G (ø)	mm	50	80	130	130
H	mm	297	297	440	440




AT FMT series

NEWMAP
never stop innovating

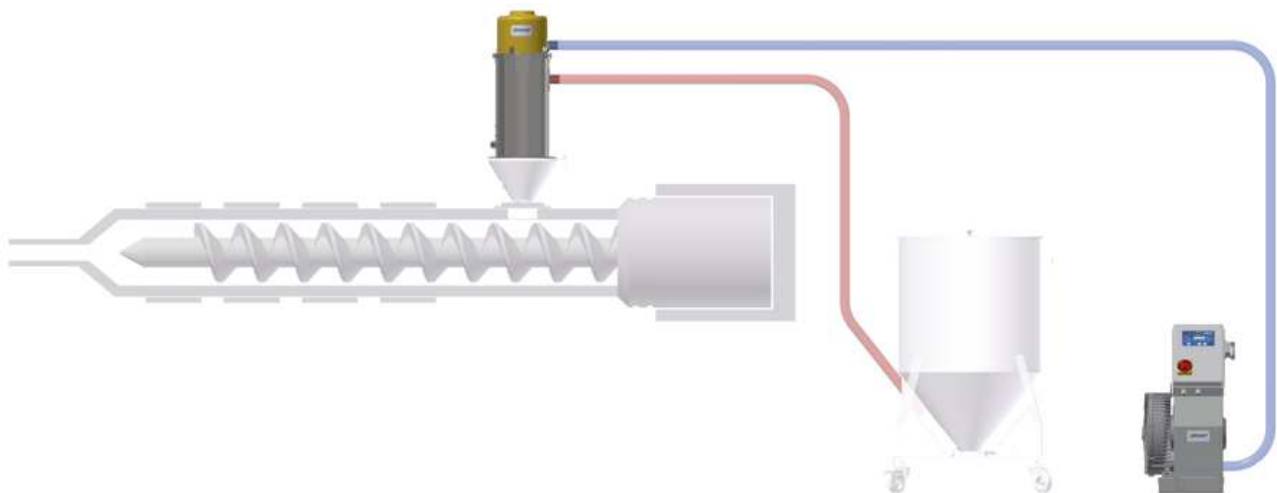




AT FMT series		AT03 FMT	AT04 FMT	AT05 FMT
Potenza motore <i>Motor power</i>	W	3000	4000	5500
Filtro <i>Filter</i>		FMT	FMT	FMT
Portata d'aria massima <i>Max air flow</i>	m ³ /h	330	320	320
Pressione statica <i>Static pressure</i>	kPa	27	36	45
Tubo del vuoto <i>Vacuum pipe</i>	ø(mm)	50 - 60	50 - 60 - 70	50 - 60 - 80
Cycloni abbinabili <i>Receivers to fit</i>	dm ³	20 ÷ 30	30 ÷ 60	30 ÷ 60

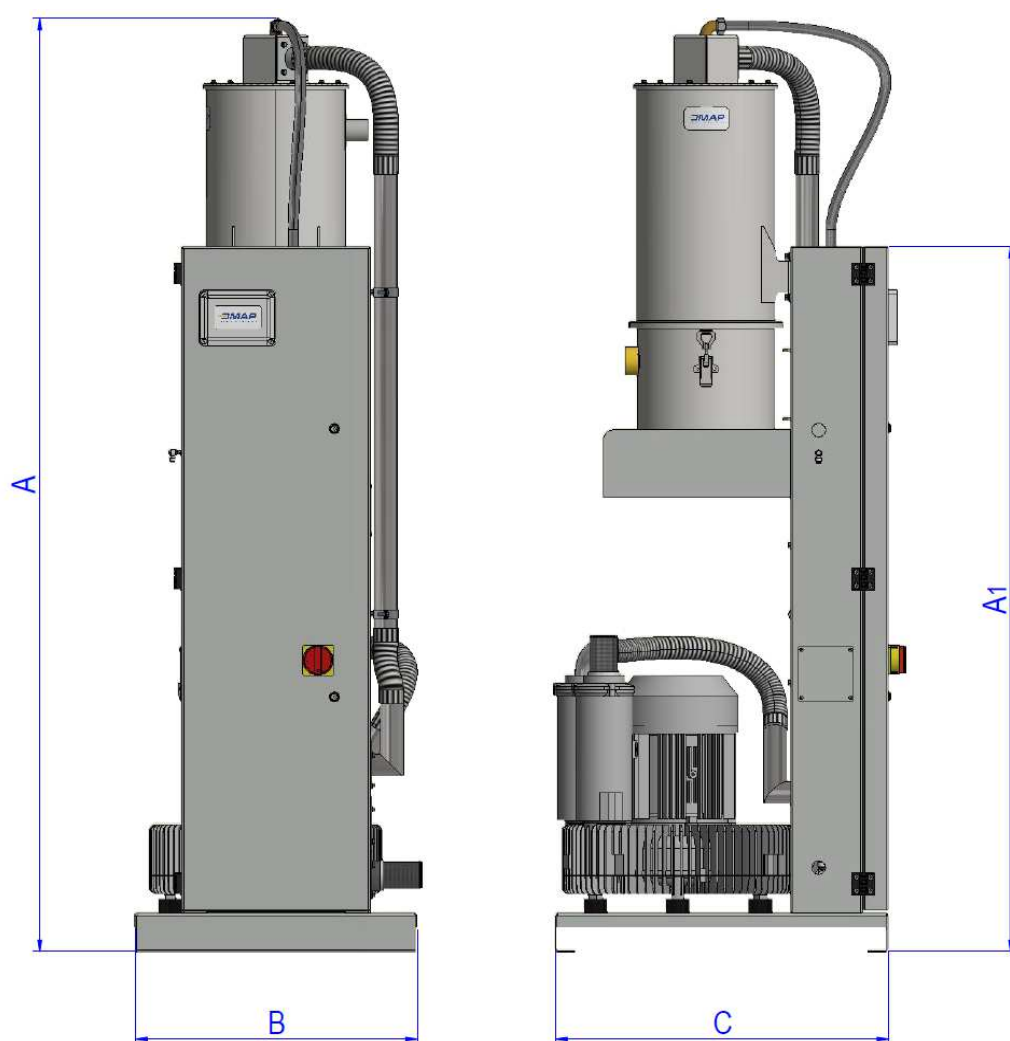

AT FMT series		AT03 FMT	AT04 FMT	AT05 FMT
A	mm	2037	2037	2037
A1	mm	1539	1539	1539
B	mm	604	604	604
C	mm	714	714	714




AT FMT series		R20	R30	R40	R60
Volume ricevitore Receiver volume	dm ³	20	30	40	60
Filtro Filter		Rete Grid	Rete Grid	Rete Grid	Rete Grid
Pulizia filtro Filter air blast		-	-	-	-
Tubo del vuoto Vacuum pipe	ø (mm)	50 - 60	50 - 60	60 - 70	60 - 70
Scarico Discharge	ø (mm)	80	80	130	130

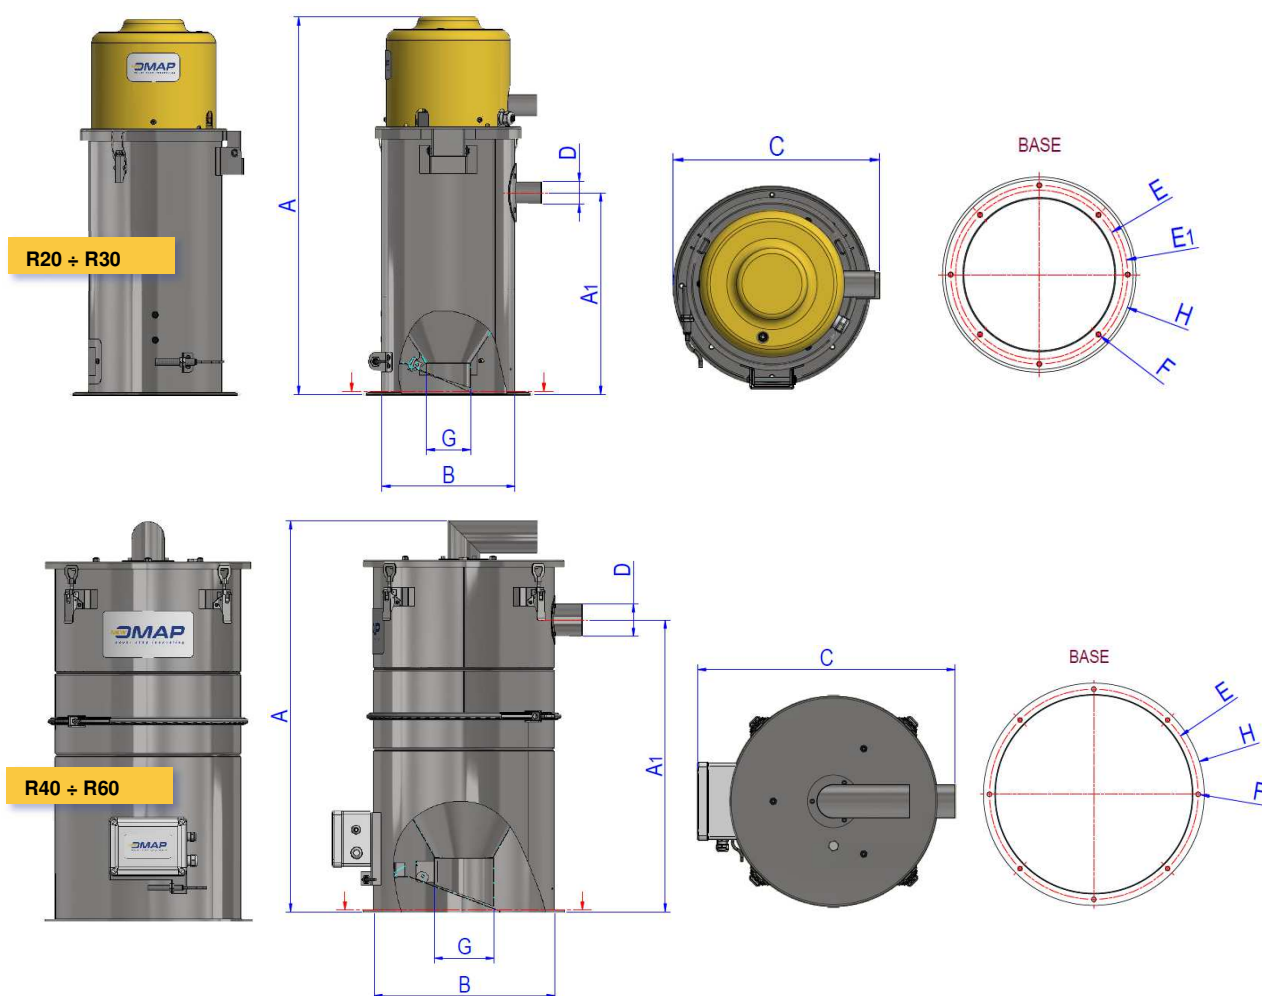

AT FMT series		R20	R30	R40	R60
A	mm	865	1089	845	1025
A1	mm	554	777	630	810
B (ø)	mm	240	240	394	394
C	mm	320	320	479	479
D (ø)	mm	50/60	50/60	60/70	60/70
E (ø)	mm	265	265	416	416
E1 (ø)	mm	280	280	-	-
F (ø)	mm	8	8	8	8
G (ø)	mm	50	80	130	130
H	mm	297	297	440	440




AT/FT series		AT00/FT	AT01/FT	AT02/FT	AT03/FT
Potenza motore <i>Motor power</i>	W	850	1500	2200	3000
Filtro <i>Filter</i>		- / FT	- / FT	- / FT	- / FT
Portata d'aria massima <i>Max air flow</i>	m ³ /h	140	210	300	330
Pressione statica <i>Static pressure</i>	kPa	16	20	21	27
Tubo del vuoto <i>Vacuum pipe</i>	ø(mm)	40 - 50	40 - 50	40 - 50 - 60	50 - 60
Cycloni abbinabili <i>Receivers to fit</i>	dm ³	4 ÷ 10	5 ÷ 10	10 ÷ 30	20 ÷ 30

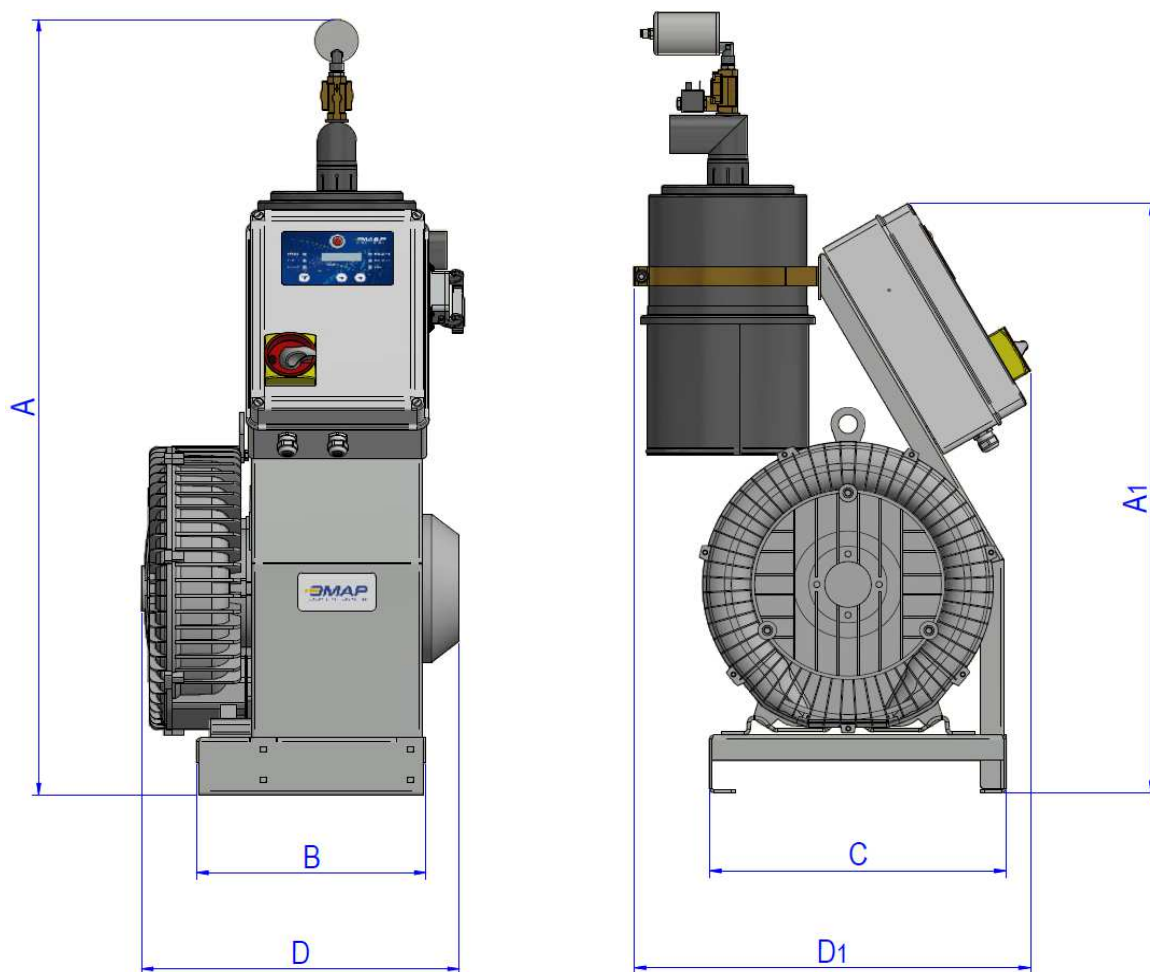

AT/FT series		AT00/FT	AT01/FT	AT02/FT	AT03/FT
A	mm	1020	1020	1020	1020
A1	mm	770	770	770	770
B	mm	296	296	296	296
C	mm	381	381	381	381
D	mm	345	350	415	415
D1	mm	510	510	510	510



AT/FT series		R04/FT	R05/FT	R10/FT	R20/FT	R30/FT
Volume ricevitore Receiver volume	dm ³	4	5	10	20	30
Filtro Filter		Tessuto / Rete Cloth / Grid	Tessuto / Rete Cloth / Grid	Tessuto / Rete Cloth / Grid	Tessuto / Rete Cloth / Grid	Tessuto / Rete Cloth / Grid
Pulizia filtro Filter air blast		Sì / No Yes / No	Sì / No Yes / No	Sì / No Yes / No	Sì / No Yes / No	Sì / No Yes / No
Tubo del vuoto Vacuum pipe	ø (mm)	40	40 - 50	40 - 50	50 - 60	50 - 60
Scarico Discharge	ø (mm)	50	80	80	80	80

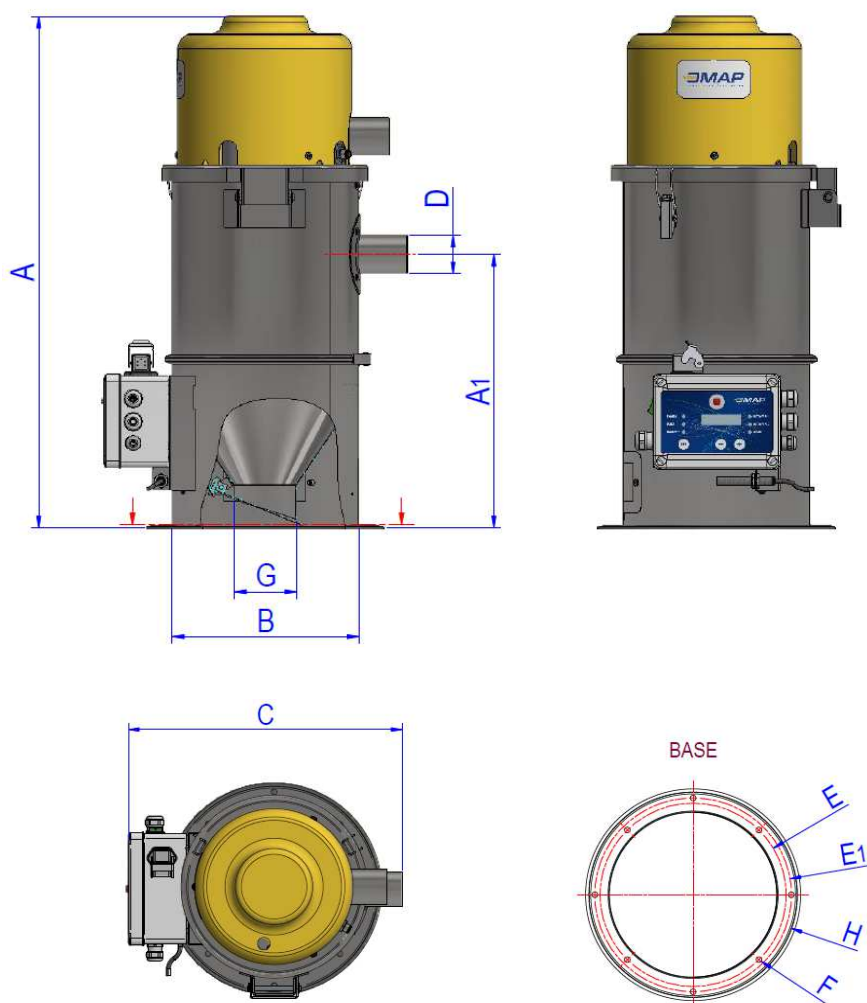

AT/FT series		R04/FT	R05/FT	R10/FT	R20/FT	R30/FT
A	mm	510	550	670	865	1089
A1	mm	246	238	358	554	777
B (ø)	mm	159	240	240	240	240
C	mm	234	320	320	320	320
D (ø)	mm	40/50	40/50	40/50	50/60	50/60
E (ø)	mm	182	265	265	265	265
E1 (ø)	mm	-	280	280	280	280
F (ø)	mm	7	8	8	8	8
G (ø)	mm	50	80	80	80	80
H	mm	200	297	297	297	297



TR		TR40	TR15	TR30	TR50
A	mm	200	525	775	775
B	mm	130 x 130	150 x 150	150 x 150	150 x 150
C (ø)	mm	320	370	370	490
D (ø)	mm	50	60	60	60
E	mm	106 x 106	109 x 109	109 x 109	109 x 109
F	mm	20 x 9	9	9	9
G (ø)	mm	265	265	265	265
G1 (ø)	mm	235	-	-	-
H	mm	6	6	6	6

